



Visual solutions created for *you*

DVLC125




Direct View LED

Fine-Pitch Indoor COB Direct View LED Display


GPO Display's DVLC Series is a fine-pitch indoor Direct View LED display lineup designed for seamless, large-format video wall applications. Featuring COB LED technology, high brightness, and a high refresh rate, the series delivers sharp image detail and smooth visual performance for close-viewing indoor environments.



Seamless Direct View LED Experience




COB LED Technology



Visual Uniformity: Factory Color, Temperature, and Brightness Calibration




High Brightness, Deep Contrast, & High Refresh Rate

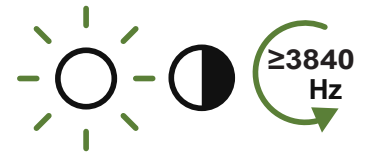


HDR Support



Wide Viewing Angle



Front-Serviceable Design



24/7 Rated



IP65 Front / IP30 Rear Protection



100,000-Hour Typical LED Lifetime



Technology Specification

Product Type	Indoor Direct View LED
LED Technology	COB
Pixel Pitch	P1.25
Aspect Ratio	16:9
Controller	NovaStar

Physical Specification

Module Resolution (W x H)	120 × 135
Module Dimensions (W x H, mm)	150 × 168.75 mm
Modules per Cabinet (W x H)	4 × 2
Cabinet Resolution (W x H)	480 × 270
Cabinet Dimensions (W x H x D, mm)	600 × 337.5 × 35 mm
Cabinet Diagonal	27.1"
Cabinet Surface Area (m ²)	0.2025 m ²
Cabinet Pixels (pixels)	129,600 pixels
Pixel Density (pixels)	640,000 pixels/m ²
Weight per Cabinet (kg/Cabinet)	4.6kg
Weight per Square Meter (kg/ m ²)	22.7kg
Cabinet Material	Die-cast aluminum
Flatness of Cabinet (mm)	≤0.10

Video / Processing Specification

Refresh Rate (Hz)	≥3840 Hz
Grey Scale (Bit)	>13Bit
Input (Cabinet)	1 × RJ45 (signal), 1 × AC Power
Output (Cabinet)	1 × RJ45 (signal), 1 × AC Power

Optical Specification

Brightness (After Calibration, nit)	600–800 nits
Color Temperature (K)	6500–8500
Viewing Angle (H x V)	≥140° / ≥120°
Contrast Ratio	15,000:1
Color Space	sRGB
Displayable Colors	16.7M
HDR Support	Yes
Brightness Uniformity	≥98%
Color Uniformity	Within 0.003Cx, Cy

Electrical Specification

Power Consumption (Max.)	≤270 W/m ² , ≤160W/Cabinet
Power Consumption (Typ.)	≤90 W/m ² , ≤50W/Cabinet
Heat Generation (Max.) (BTU/hr)	114.6
Heat Generation (Typ.) (BTU/hr)	57.3
Power Supply (internal / remote)	Internal (based on cabinet)
Input Voltage	AC 100–240V

Environmental / Operational Specification

LED Lifetime (Half Brightness)	≥100,000 hours
Operating Temperature (°C)	0°C ~ 60°C
Operating Humidity	10% ~ 80% RH (non-condensing)
Storage Temperature (°C)	-10°C ~ 60°C
Storage Humidity	10% ~ 80%RH (non-condensing)
Usage Ratings (hrs/days)	24/7
IP Rating	IP65 (Front) / IP30 (Back)

Additional Info.

Orientation	Landscape
Environment	Indoor
Compatible Controllers	NovaStar
90-degree Corner Cut	No
Service Access (Front / Rear)	Front



Accessories:

- Ethernet cable(s)
- Wall mounting bracket(s)
- Wall mounting plate(s)
- AC Power cable(s)
 - Hardwired or Direct-Wired
 - Cord-and-Plug



Options:

- Controller
 - 4-port (2.6million pixels)
 - 6-port (3.9million pixels)
 - 10-port (6.5million pixels)
 - 20-port (13million pixels)

Display Only

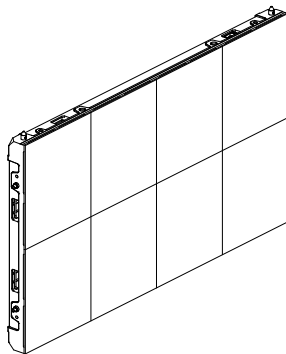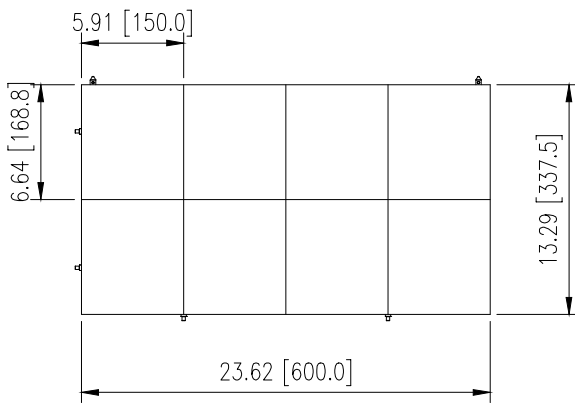

Front

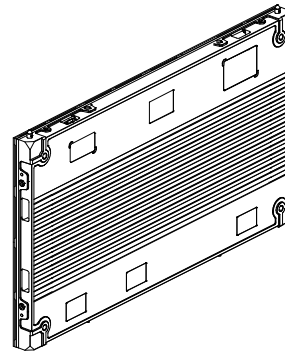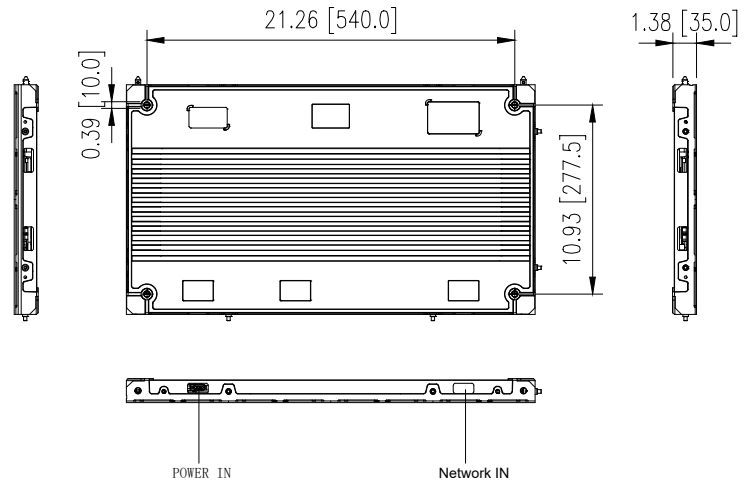

Rear