



Visual solutions created for *you*

DK32N



4K/Ultra-HD

Commercial Monitor


Our 4K/Ultra HD monitors offer four times the resolution of Full HD along with 24/7/365 reliability. As with all of our Commercial LCDs, customizable housing allows these displays to fit into existing interior design seamlessly.



Highlights

DK32N

Sleek, unbranded, black powder-coated metal housing.



“Secure-Ready” = No NFC, RF, WiFi, or embedded computing.



24/7-rated.



Specifications

DK32N

Panel Attributes

Panel Technology	Commercial-grade IPS/ LED-LCD
Surface Treatment	Hard coating (3H), Anti-glare treatment of the front polarizer (Haze ~25% typ.)
Screen Size (diag.)	31.5"
Native Resolution	3840 x 2160
Active Area (mm)	697.31 x 392.23
Brightness (typ.)	400nit
Contrast Ratio (typ.)	1,300:1
Displayable Colors	10bit(D), 1.07 Billion colors
Viewing Angle	178° / 178°
Aspect Ratio	16:9
Refresh Rate	60Hz

Dimensions, Power & Other

Display Dimensions (W x H x D) + Weight	28.05 x 16.15 x 1.99 (in) - 21lbs
Packed Dimensions (W x H x D) + Weight	32.68 x 20.87 x 7.09 (in) - 28lbs
Display Orientation	Landscape or Portrait
Heat Output (BTU/hr)	239
Mounting Pattern (mm)	200 x 100
Electrical Ratings	AC 100 - 240V (50/60Hz)
Power Consumption (typ.)	70W
Standby Power Consumption	<1W
Operating Temperature	32°F - 122°F
Operating Humidity Range	20~90%
Industrial Reliability	30,000+ Hours
Usage Ratings (hrs/days)	24/7**
Warranty	Two Years (parts & labor)
Built-in speaker	10W x 2

****Consult with GPO Display regarding best practices for preventing image retention and for prolonging display lifetime.**

Connectivity

HDMI	2 x Input
DisplayPort	2 x Input
RS-232	1 x Input

Accessories:

- RS-232 cable x1
- HDMI cable x1
- AC Power Cord x1
- Remote Control x1
- Batteries for remote control


Includes:

- Serial Control Software

Options:

- Custom Logos
- Custom Housing Colors
- Anti-Glare Protective Glass
- Tempered Glass

Front View

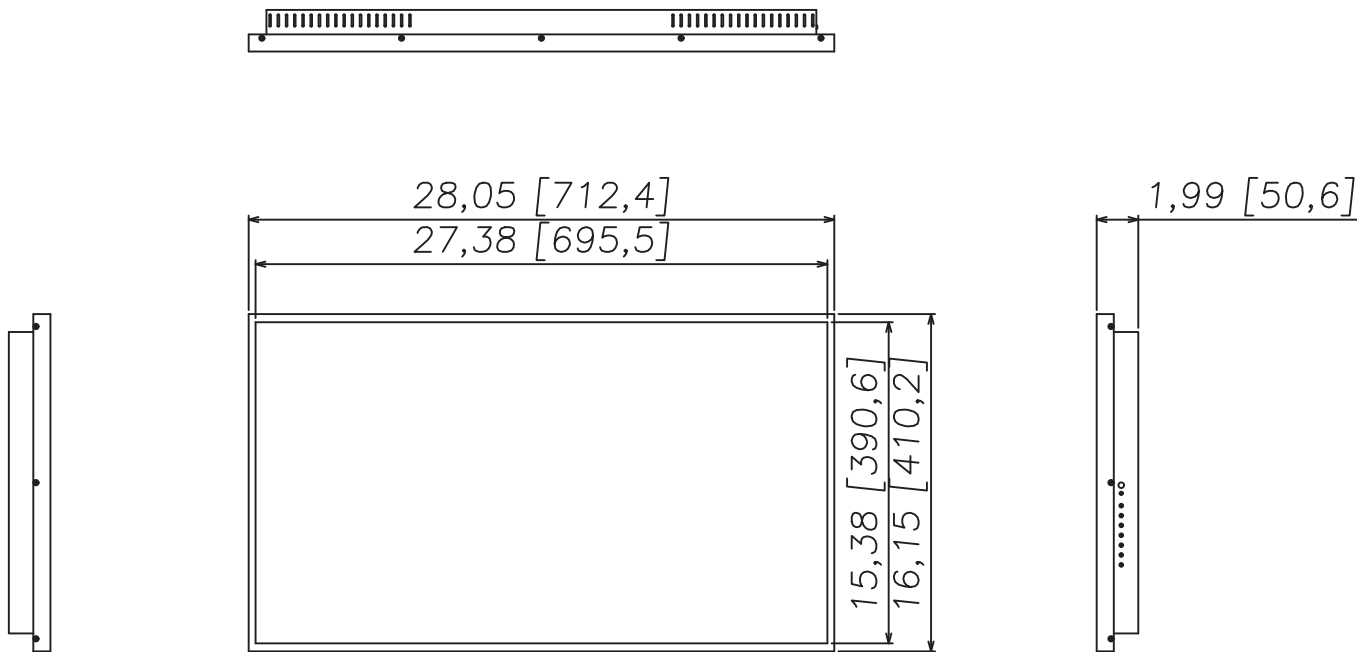

Rear View

