



Visual solutions created for *you*

TS65KP10



Touch Screen

Commercial Monitor

This premium line of PCAP touch screens delivers on both performance and appearance. Each model can be configured upon request to fit into wall pockets, tables, or other fixtures.



Highlights

TS65KP10

Customizable housing.



10pt projected capacitive (PCAP) touch.




"Secure-Ready" = No NFC, RF, WiFi, or embedded computing.




24/7-rated.



Video wall-capable (DP output and video wall mode).



Local dimming.



Panel Attributes

Panel Technology	Commercial-grade LED-LCD
Surface Treatment	Hard coating (2H), Anti-glare treatment (Haze 28%)
Screen Size (diag.)	65"
Native Resolution	3840 × 2160
Active Area (mm)	1428.48 × 803.52
Brightness (typ.)	500nit
Contrast Ratio (typ.)	1,100:1
Displayable Colors	1.07 Billion, 10-bit(D)
Viewing Angle	178°/ 178°
Aspect Ratio	16:9
Refresh Rate	60Hz

Dimensions, Power & Other

Display Dimensions (W x H x D) + Weight	59.65 × 35.04 × 2.86 (in) - 137lbs
Packed Dimensions (W x H x D) + Weight	64.17 × 42.72 × 11.02 (in) - 146lbs
Display Orientation	Landscape or Portrait
Heat Output (BTU/hr)	512
Mounting Pattern (mm)	600 × 400
Electrical Ratings	AC 100–240V (50/60Hz)
Power Consumption (typ.)	153W
Standby Power Consumption	<1W
Operating Temperature	32°F–122°F
Operating Humidity Range	10~90%
Industrial Reliability	50,000+ Hours
Usage Ratings (hrs/days)	24/7**
Warranty	Two Years (parts & labor)

****Consult with GPO Display regarding best practices for preventing image retention and for prolonging display lifetime.**

Touch Specification

Technology	Projected Capacitive Touch
Glass	4mm Tempered Glass
Simultaneous Touch Points	10 pt
Touch Accuracy	1.5mm
Response Time	16ms
Interface	USB 2.0, HID-Compliant, Plug & Play
Supported OS	Windows / Android / Mac* / Linux (1pt)
Detection Method	Finger, gloved hand or any other pointer

*Drivers may be required for Mac OS. Contact GPO Display for more information.

Connectivity

HDMI	3 x Input
DisplayPort	2 x Input; 1 x Output
RS-232	1 x Input; 1 x Output
USB Type-A	1 x Touch; 1 x Service Use Only
RJ45 / LAN	1 x Input (for control & monitoring)
AC Power Inlet	1 x Input
Audio Out	1 x 3.5 mm Jack; Built-in Speaker 10 W x 2

Accessories:

- (1) RS-232 cable
- (1) HDMI cable
- (1) AC power cord
- (1) Remote control
- (2) AAA batteries


Includes:

- Serial control software


Options:

- Custom logos
- Custom housing colors
- Anti-Glare protective glass
- Tempered glass

Front View

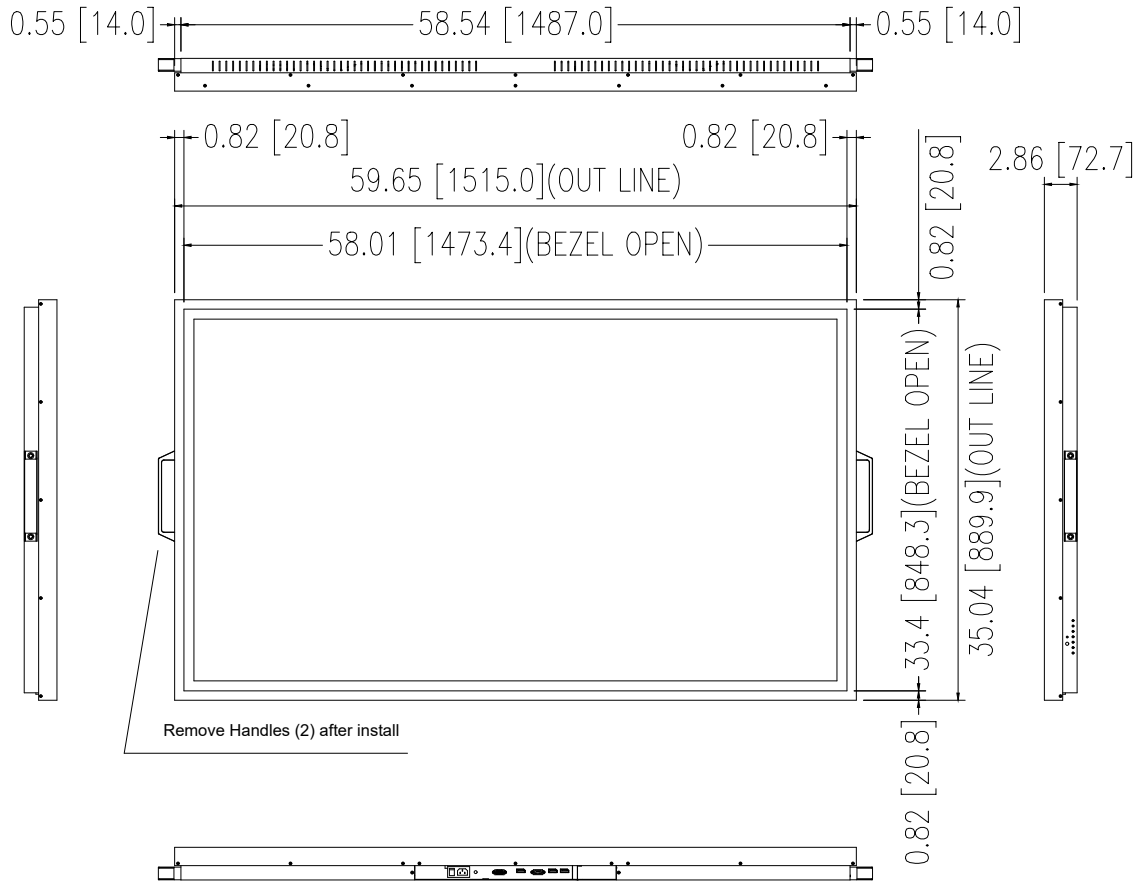

Rear View

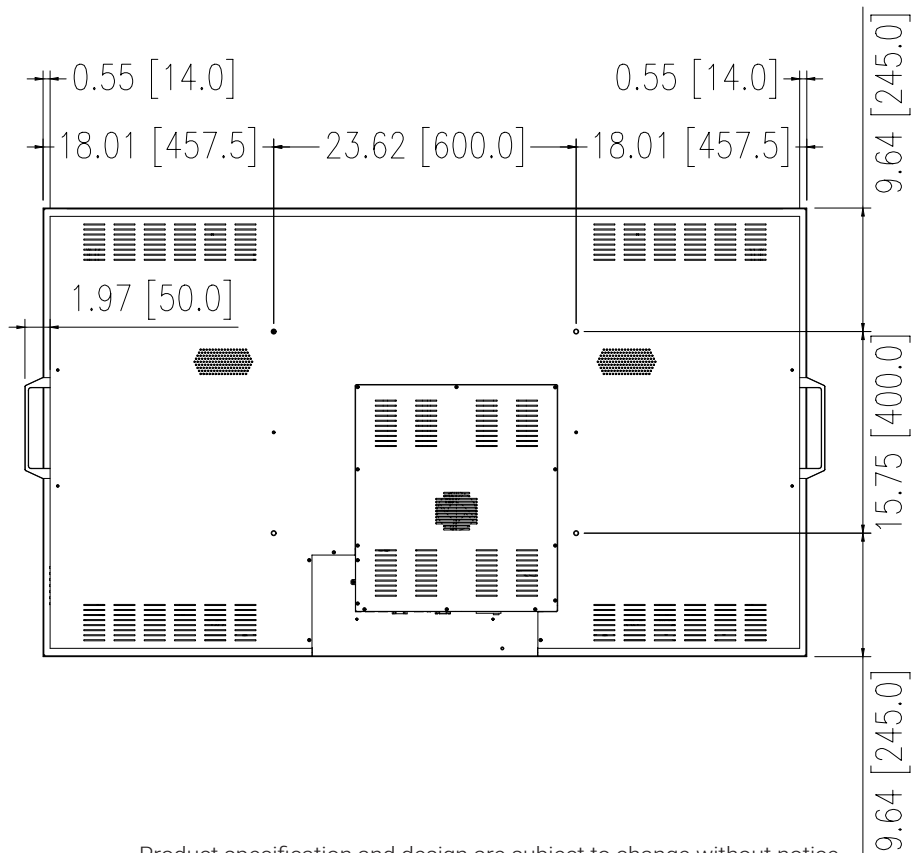

Product specification and design are subject to change without notice.