




Visual solutions created for *you*

TS98KR12

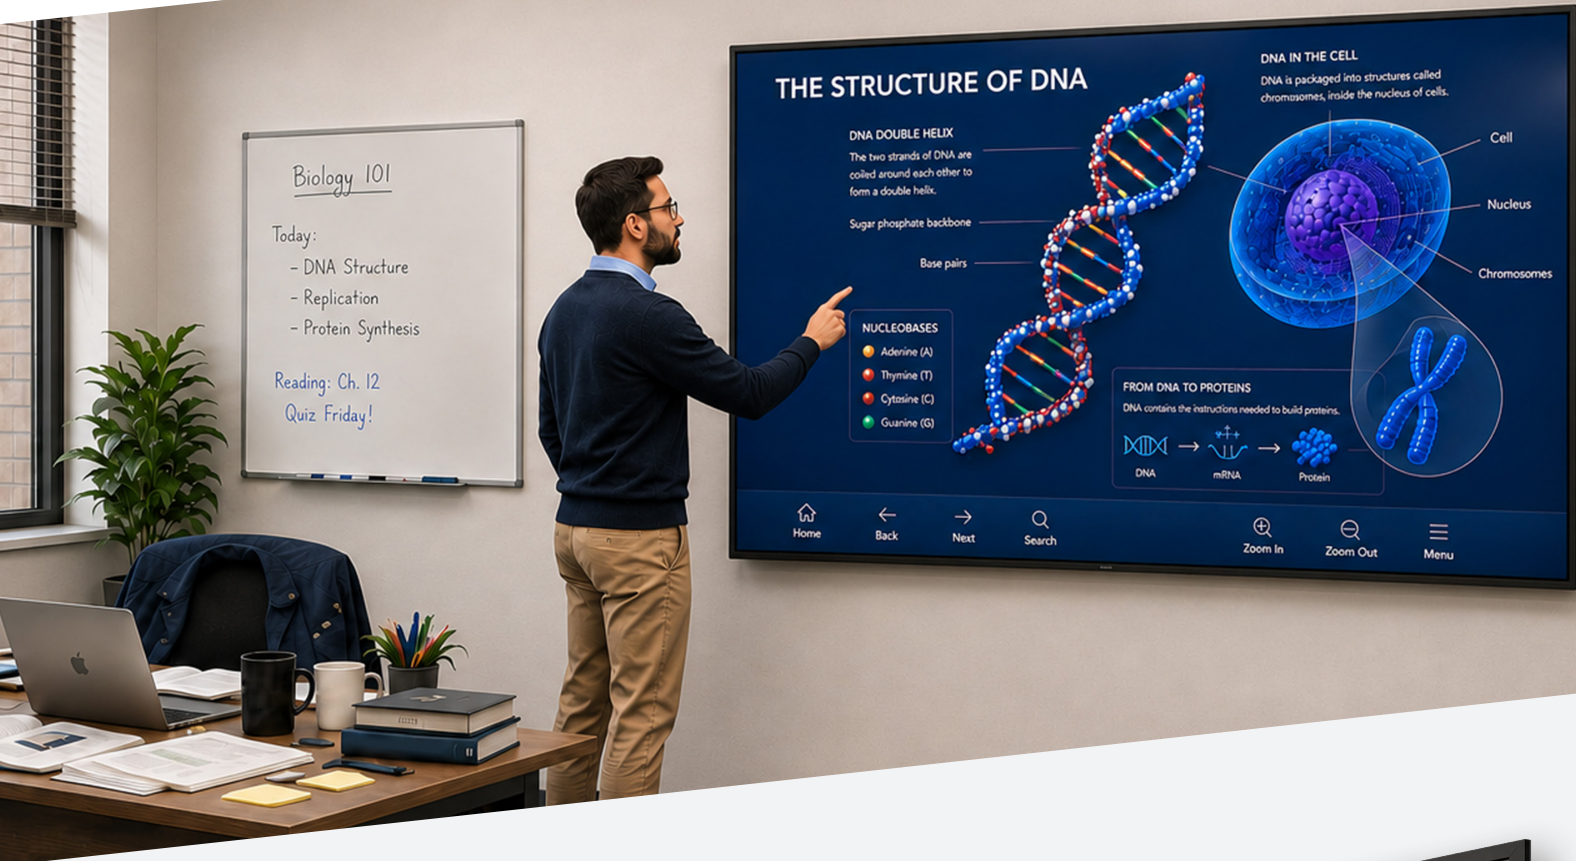

Touch Screen

Commercial Monitor

This premium line of IR touch screens delivers on both performance and appearance. Each model can be configured upon request to fit into wall pockets, tables, or other fixtures.



Customizable housing.



12pt Infrared (IR) touch.




"Secure-Ready" = No NFC, RF, WiFi, or embedded computing.




24/7-rated.



Video wall-capable (DP output and video wall mode).



Local dimming.



Panel Attributes

Panel Technology	Commercial-grade LED-LCD
Surface Treatment	Hard coating (2H), Anti-glare treatment (Haze 28%)
Screen Size (diag.)	98"
Native Resolution	3840 × 2160
Active Area (mm)	2158.85 × 1214.35
Brightness (typ.)	500nit
Contrast Ratio (typ.)	1,200:1
Displayable Colors	1.07 Billion, 10-bit(D)
Viewing Angle	178° / 178°
Aspect Ratio	16:9
Refresh Rate (typ.)	60Hz

Dimensions, Power & Other

Display Dimensions (W x H x D) + Weight	86.87 × 49.68 × 4.65 (in) - 297lbs
Packed Pallet Dimensions (W x H x D) + Weight	107 × 71 × 28 (in) - 617lbs* <i>*single display shipped via wooden crate</i>
Display Orientation	Landscape or Portrait
Heat Output (BTU/hr)	1654
Mounting Pattern (mm)	800 × 600
Electrical Ratings	AC 100–240V (50/60Hz)
Power Consumption (max.)	592W
Standby Power Consumption	<1W
Operating Temperature	32°F–122°F
Operating Humidity Range	10~90%
Industrial Reliability	50,000+ Hours
Usage Ratings (hrs/days)	24/7**
Warranty	Two Years (parts & labor)

****Consult with GPO Display regarding best practices for preventing image retention and for prolonging display lifetime.**

Touch Specification

Technology	Infrared Touch
Glass	5mm AG Coated Tempered Glass
Simultaneous Touch Points	12 pt
Touch Accuracy	2mm
Response Time	≤ 10ms @ single point, ≤ 16ms @ 10 points
Interface	USB 2.0, HID-Compliant, Plug & Play
Supported OS	Windows / Android / Mac* / Linux (1pt)
Detection Method	Finger, gloved hand, or any other pointer
Min. Touch Object Size	Single Touch : Ø 6 mm, Multi Touch : Ø 8 mm

*Drivers may be required for Mac OS. Contact GPO Display for more information.

Connectivity

HDMI	3 x Input
DisplayPort	2 x Input; 1 x Output
RS-232	1 x Input; 1 x Output
USB Type-A	1 x Touch; 1 x Service Use Only
RJ45 / LAN	1 x Input (for control & monitoring)
AC Power Inlet	1 x Input
Audio Out	1 x 3.5 mm Jack; Built-in Speaker 10 W x 2

Accessories:

- (1) RS-232 cable
- (1) HDMI cable
- (1) AC power cord
- (1) Remote control
- (2) AAA batteries


Includes:

- Serial control software

Options:

- Custom logos
- Custom housing colors
- Anti-Glare protective glass
- Tempered glass

Front View

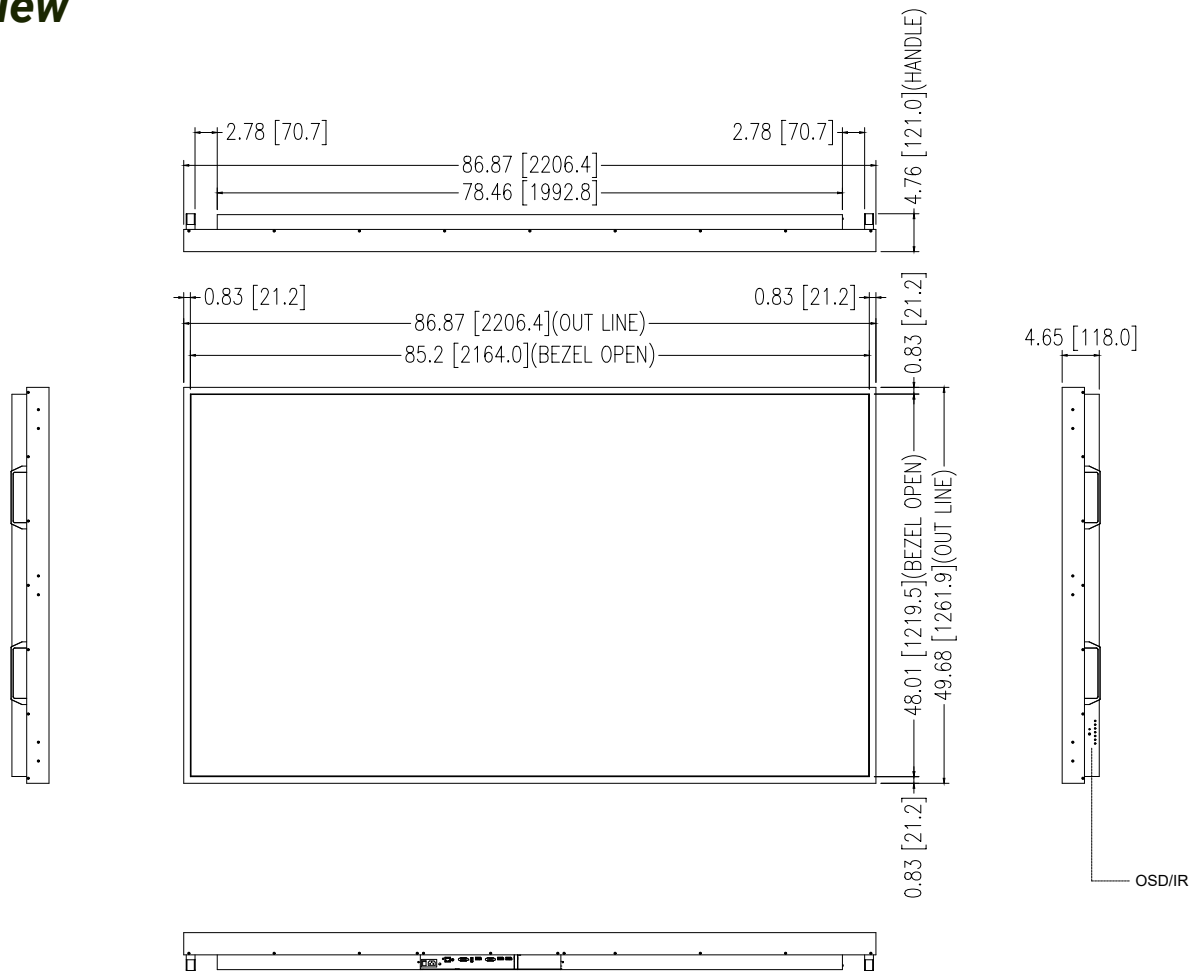

Rear View

