



Visual solutions created for *you*

DU65KC-TR



Table-Ready Touch Screen

Commercial Monitor

This premium line of table-ready PCAP touch screens delivers on both performance and appearance. This model is configured to fit into tables or other fixtures.



Highlights

DU65KC-TR

Customizable housing.



10pt projected capacitive (PCAP) touch.




"Secure-Ready" = No NFC, RF, WiFi, or embedded computing.



24/7-rated.



Video wall-capable (DP output and video wall mode).



Panel Attributes

Panel Technology	Commercial-grade LED-LCD
Surface Treatment	Hard coating (2H), Anti-glare treatment of the front polarizer (Haze 28% typ.)
Screen Size (diag.)	65"
Native Resolution	3840 x 2160
Active Area (mm)	1428.48 x 803.52
Brightness (typ.)	500nit
Contrast Ratio (typ.)	1,000:1
Displayable Colors	10bit(D), 1.07 Billion colors
Viewing Angle	178°/ 178°
Aspect Ratio	16:9
Refresh Rate	120Hz

Dimensions, Power & Other

Display Dimensions (W x H x D) + Weight	59.76 x 35.16 x 3.13 (in) - 137lbs
Packed Dimensions (W x H x D) + Weight	64.17 x 42.72 x 11.02 (in) - 146lbs
Display Orientation	Landscape or Portrait
Heat Output (BTU/hr)	512
Mounting Pattern (mm)	600 x 400
Electrical Ratings	AC 100 - 240V (50/60Hz)
Power Consumption (typ.)	150W
Standby Power Consumption	<1W
Operating Temperature	32°F - 122°F
Operating Humidity Range	10~90%
Industrial Reliability	50,000+ Hours
Usage Ratings (hrs/days)	24/7**
Warranty	One Year (parts & labor)

****Consult with GPO Display regarding best practices for preventing image retention and for prolonging display lifetime.**

Touch Specification

Technology	Projected Capacitive Touch
Glass	6mm Tempered Glass
Simultaneous Touch Points	10 pt
Touch Accuracy	2mm
Response Time	16ms
Interface	USB 2.0, HID-Compliant, Plug & Play
Supported OS	Windows / Android / Mac* / Linux (1pt)
Detection Method	Finger, gloved hand or any other pointer
Min. Touch Object Size	9mm

*Drivers may be required for Mac OS. Contact GPO Display for more information.

Connectivity

HDMI	3 x Input
DisplayPort	2 x Input, 1 x Output
RS-232	1 x Input, 1 x Output
AC Power Inlet	1
Built-in Speaker	10W x 2

Accessories:

- RS-232 cable x1
- DP cable x1
- AC power cord x1
- Remote control x1
- Batteries for remote control


Includes:

- Serial control software

Options:

- Custom logos
- Custom housing colors
- Anti-Glare protective glass
- Tempered glass

Front View

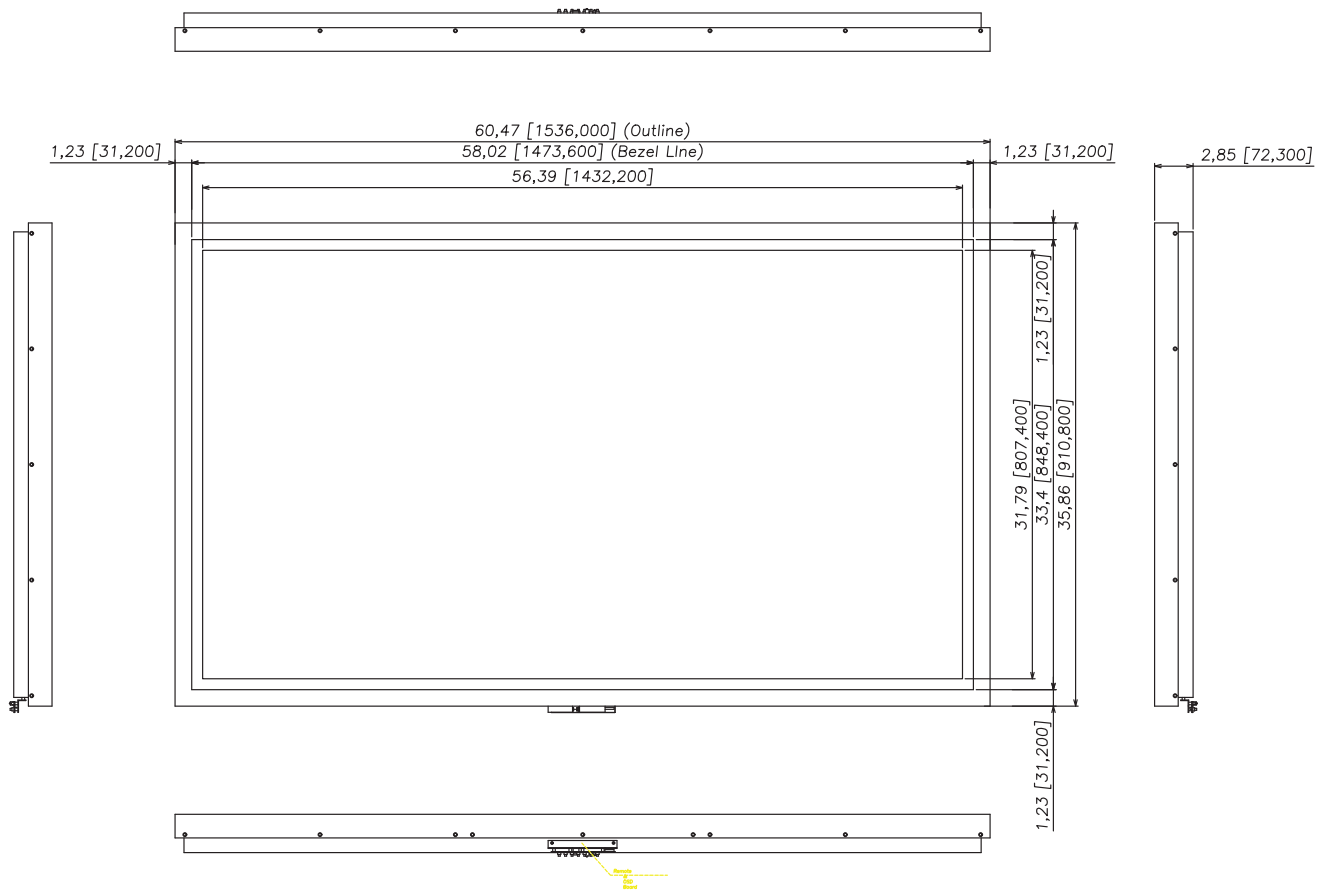

Rear View

